


**714-PP-1NN-31-008101**

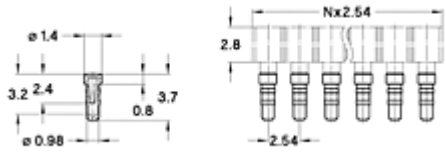


Single row carrier with contacts for solder press-fit mount into plated trough PCB hole  $\varnothing$  1.05  $\pm$ 0.05 mm finished. PCB thickness 1.5 to 2.5 mm.

**Mating pin  $\varnothing$  0.47 mm**

Availability from: 2 to 64 contacts.  
Standard number of contacts 64.

Double row, disposable carrier strips on request.

**714-PP-1NN-31-012101**

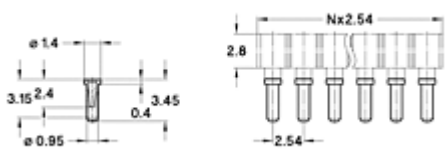


Single row carrier with ultra thin, low profi contact for solder mount into PCB hole  $\varnothing$  1.3 mm. PCB thickness 1 to 2.4 mm.

**Mating pin  $\varnothing$  0.47 mm**

Availability from: 2 to 64 contacts.  
Standard number of contacts 64.

Double row, disposable carrier strips on request.

**714-PP-1NN-31-018101**

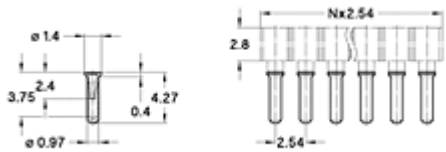


Single row carrier with ultra thin, low profi contact for solder mount into PCB hole  $\varnothing$  1.3 mm. PCB thickness 1 to 3.4 mm.

**Mating pin  $\varnothing$  0.47 mm**

Availability from: 2 to 64 contacts.  
Standard number of contacts 64.

Double row, disposable carrier strips on request.

**714-PP-1NN-41-001101**

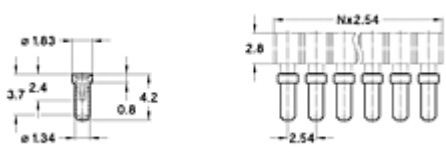


Single row carrier with low profile contact solder mount into PCB hole  $\varnothing$  1.4-1.8 mm PCB thickness 1 to 2.6 mm.

**Mating pin  $\varnothing$  0.47 mm**

Availability from: 2 to 64 contacts.  
Standard number of contacts 64.

Double row, disposable carrier strips on request.

**714-PP-1NN-41-014101**

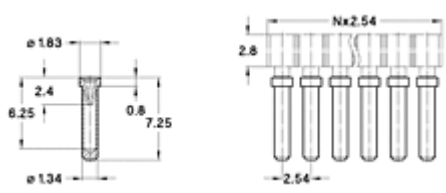

Single row carrier with low profile contact solder mount into PCB hole  $\varnothing$  1.4-1.8 mm PCB thickness 1 to 5 mm.

**Mating pin  $\varnothing$  0.47 mm**

Availability from: 2 to 64 contacts.  
Standard number of contacts 64.

Double row, disposable carrier strips on request.

---